



STREET LIGHT SERIES

STREET LIGHTING

GAZE



MODEL	POWER	LUMENS	DIMENSION
DZ-07-SL02GZ**-15W	15W	1500LM	
DZ-07-SL02GZ**-20W	20W	2000LM	
DZ-07-SL02GZ**-24W	24W	2400LM	
DZ-07-SL02GZ**-30W	30W	3000LM	
DZ-07-SL02GZ**-36W	36W	3600LM	
DZ-07-SL02GZ**-50W	50W	5000LM	

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza GAZE area light fixtures sleek, reliable design with precise ANSI optical distributions to make them the ideal upgrade for area/site, roadway, and security applications. GAZE is made with premium grade aluminium die cast housing with vandal resistant polycarbonate lens with high quality LED Chips.

LA DESCRIPTION

Luminaire de zone **LeDenza** GAZE design élégant et fiable avec des distributions optiques ANSI précises pour en faire la mise à niveau idéale pour les applications de zone/site, de chaussée et de sécurité. GAZE est fabriqué avec un boîtier en aluminium moulé sous pression de qualité supérieure avec une lentille en polycarbonate résistant au vandalisme avec des puces LED de haute qualité.

AREA OF APPLICATION

Street Lighting, Area Lighting, Parkings

FEATURES

POWER FACTOR

INPUT

OPERATING TEMP.

LIFE SPAN

High Efficacy

Easy Installation

More Bright

Long Life

0.95


220-240V AC

-10°C to 40°C

40,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

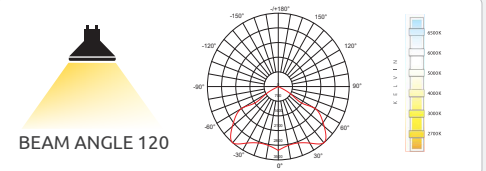

LED DRIVERS

OSRAM **FULHAM** **PHILIPS**

LED CHIPS

bridgelux **CREE** **CITIZEN** **NICHIA**

STREET LIGHTING

GLAMOUR



MODEL	POWER	LUMENS	DIMENSION
DZ-07-SL03GL**-20W	20W	2000LM	
DZ-07-SL03GL**-24W	24W	2400LM	
DZ-07-SL03GL**-30W	30W	3000LM	
DZ-07-SL03GL**-36W	36W	3600LM	
DZ-07-SL03GL**-50W	50W	5000LM	

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza GLAMOUR area light fixtures sleek, reliable design with precise ANSI optical distributions to make them the ideal upgrade for area/site, roadway, and security applications. GLAMOUR is made with premium grade aluminium die cast housing with vandal resistant polycarbonate lens with high quality LED Chips.

LA DESCRIPTION

Luminaire de zone **LeDenza** GLAMOUR design élégant et fiable avec des distributions optiques ANSI précises pour en faire la mise à niveau idéale pour les applications de zone/site, de chaussée et de sécurité. GLAMOUR est fabriqué avec un boîtier en aluminium moulé sous pression de qualité supérieure avec une lentille en polycarbonate résistant au vandalisme avec des puces LED de haute qualité.

AREA OF APPLICATION

Street Lighting, Area Lighting, Parkings

FEATURES

POWER FACTOR

INPUT

OPERATING TEMP.

LIFE SPAN

High Efficacy

Easy Installation

More Bright

Long Life

0.95


220-240V AC

-10°C to 40°C

40,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

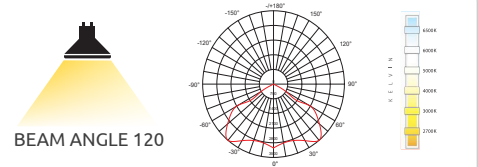

LED DRIVERS

OSRAM FULHAM PHILIPS

LED CHIPS

bridgelux. CREE CITIZEN NICHIA

STREET LIGHTING

MERCURE



MODEL	POWER	LUMENS	DIMENSION
DZ-07-SL05MR**-24W	24W	2400LM	
DZ-07-SL05MR**-36W	36W	3600LM	
DZ-07-SL05MR**-50W	50W	5000LM	
DZ-07-SL05MR**-100W	100W	10000LM	

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza MERCURE area light fixtures sleek, reliable design with precise ANSI optical distributions to make them the ideal upgrade for area/site, roadway, and security applications. MERCURE is made with premium grade aluminium die cast housing with vandal resistant polycarbonate lens with high quality LED Chips.

LA DESCRIPTION

Luminaire de zone **LeDenza** MERCURE design élégant et fiable avec des distributions optiques ANSI précises pour en faire la mise à niveau idéale pour les applications de zone/site, de chaussée et de sécurité. MERCURE est fabriqué avec un boîtier en aluminium moulé sous pression de qualité supérieure avec une lentille en polycarbonate résistant au vandalisme avec des puces LED de haute qualité.

AREA OF APPLICATION


Street Lighting, Area Lighting, Parkings

FEATURES

FEATURES	High Efficacy
	Easy Installation
	More Bright
	Long Life
POWER FACTOR	0.95
INPUT	220-240V AC
OPERATING TEMP.	-10°C to 40°C
LIFE SPAN	40,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

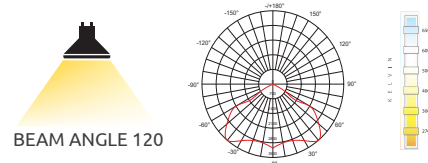

LED DRIVERS



LED CHIPS



STREET LIGHTING

TOURA



MODEL	POWER	LUMENS	DIMENSION
DZ-07-SL08TR**-36W	36W	3600LM	
DZ-07-SL08TR**-50W	50W	5000LM	
DZ-07-SL08TR**-60W	60W	6000LM	
DZ-07-SL08TR**-75W	75W	7500LM	
DZ-07-SL08TR**-100W	100W	10000LM	

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenzaTOURA area light fixtures sleek, reliable design with precise ANSI optical distributions to make them the ideal upgrade for area/site, roadway, and security applications. TOURA is made with premium grade aluminium die cast housing with vandal resistant polycarbonate lens with high quality LED Chips.

LA DESCRIPTION

Luminaire de zone **LeDenza** TOURA design élégant et fiable avec des distributions optiques ANSI précises pour en faire la mise à niveau idéale pour les applications de zone/site, de chaussée et de sécurité. TOURA est fabriqué avec un boîtier en aluminium moulé sous pression de qualité supérieure avec une lentille en polycarbonate résistant au vandalisme avec des puces LED de haute qualité.

AREA OF APPLICATION

Street Lighting, Area Lighting, Parkings

FEATURES

POWER FACTOR

INPUT

OPERATING TEMP.

LIFE SPAN

High Efficacy

Easy Installation

More Bright

Long Life

0.95


220-240V AC

-10°C to 40°C

40,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

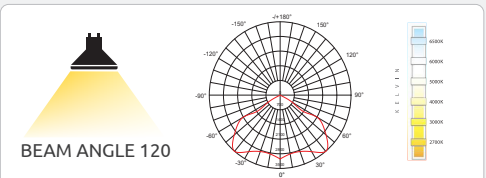

LED DRIVERS

OSRAM FULHAM PHILIPS

LED CHIPS

bridgelux. CREE CITIZEN NICHIA


STREET LIGHTING

ZESTY



MODEL	POWER	LUMENS	DIMENSION
DZ-07-SL10ZS**-20W	20W	2000LM	
DZ-07-SL10ZS**-24W	24W	2400LM	
DZ-07-SL10ZS**-30W	30W	3000LM	
DZ-07-SL10ZS**-50W	50W	5000LM	
DZ-07-SL10ZS**-100W	100W	10000LM	

**CW = 6500K; NW = 4000K; WW = 3000K

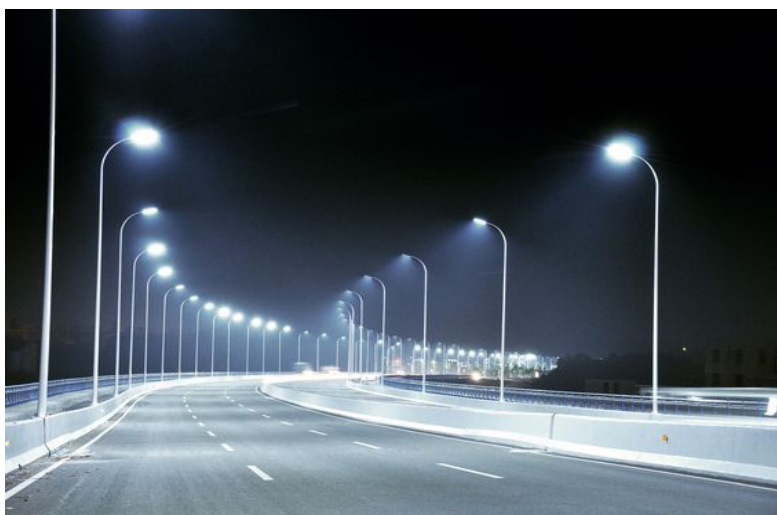

DESCRIPTION

LeDenza ZESTY area light fixtures sleek, reliable design with precise ANSI optical distributions to make them the ideal upgrade for area/site, roadway, and security applications. ZESTY is made with premium grade aluminium die cast housing with vandal resistant polycarbonate lens with high quality LED Chips.

LA DESCRIPTION

Luminaire de zone **LeDenza ZESTY** design élégant et fiable avec des distributions optiques ANSI précises pour en faire la mise à niveau idéale pour les applications de zone/site, de chaussée et de sécurité. ZESTY est fabriqué avec un boîtier en aluminium moulé sous pression de qualité supérieure avec une lentille en polycarbonate résistant au vandalisme avec des puces LED de haute qualité.

AREA OF APPLICATION


Street Lighting, Area Lighting, Parkings

FEATURES

FEATURES	High Efficacy
	Easy Installation
	More Bright
	Long Life
POWER FACTOR	0.95
INPUT	220-240V AC
OPERATING TEMP.	-10°C to 40°C
LIFE SPAN	40,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

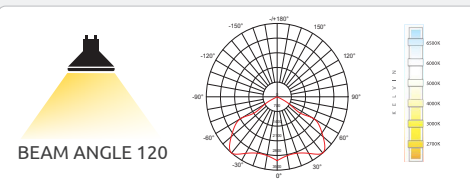

LED DRIVERS

OSRAM **FULHAM** **PHILIPS**

LED CHIPS

bridgelux **CREE** **CITIZEN** **NICHIA**

STREET LIGHTING

GRITZ



MODEL	POWER	LUMENS	DIMENSION
DZ-07-SL09GR**-50W	50W	5000LM	
DZ-07-SL09GR**-100W	100W	10000LM	

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza GRITZ area light fixtures sleek, reliable design with precise ANSI optical distributions to make them the ideal upgrade for area/site, roadway, and security applications. GRITZ is made with premium grade aluminium die cast housing with vandal resistant polycarbonate lens with high quality LED Chips.

LA DESCRIPTION

Luminaire de zone **LeDenza** GRITZ design élégant et fiable avec des distributions optiques ANSI précises pour en faire la mise à niveau idéale pour les applications de zone/site, de chaussée et de sécurité. GRITZ est fabriqué avec un boîtier en aluminium moulé sous pression de qualité supérieure avec une lentille en polycarbonate résistant au vandalisme avec des puces LED de haute qualité.

AREA OF APPLICATION

Street Lighting, Area Lighting, Highways

FEATURES

POWER FACTOR

INPUT

OPERATING TEMP.

LIFE SPAN

High Efficacy

Easy Installation

More Bright

Long Life

0.95


220-240V AC

-10°C to 40°C

40,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

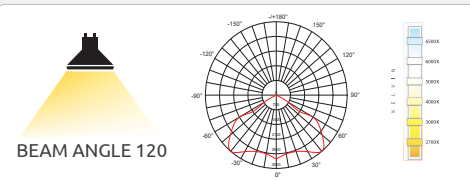

LED DRIVERS

OSRAM FULHAM PHILIPS

LED CHIPS

bridgelux. CREE CITIZEN NICHIA

STREET LIGHTING

GRANDEUR



MODEL	POWER	LUMENS	DIMENSION
DZ-07-SL16GR**-24W	24W	2880LM	75x150x90mm
DZ-07-SL16GR**-36W	36W	4320LM	117x262x90mm
DZ-07-SL16GR**-50W	50W	6000LM	170x345x90mm
DZ-07-SL16GR**-100W	100W	12000LM	200x385x90mm

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza GRANDEUR area light fixtures sleek, reliable design with precise ANSI optical distributions to make them the ideal upgrade for area/site, roadway, and security applications. INSPIRE is made with premium grade aluminium die cast housing with wide beam angle using high quality LED Chips.

LA DESCRIPTION

Les luminaires de zone **LeDenza** GRANDEUR ont une conception élégante et fiable avec des distributions optiques ANSI précises pour en faire la mise à niveau idéale pour les applications de zone/site, de chaussée et de sécurité. INSPIRE est fabriqué avec un boîtier en aluminium moulé sous pression de qualité supérieure avec un angle de faisceau large utilisant des puces LED de haute qualité.

AREA OF APPLICATION


Street Lighting, Area Lighting, Parkings

FEATURES

FEATURES	High Efficacy
	Easy Installation
	More Bright
	Long Life
POWER FACTOR	0.95
INPUT	220-240V AC
OPERATING TEMP.	-10°C to 40°C
LIFE SPAN	40,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

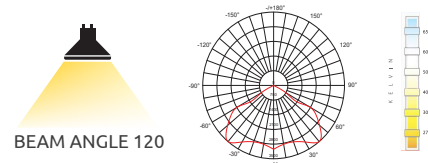

LED DRIVERS

MW OSRAM FULHAM PHILIPS

LED CHIPS

bridgelux. CREE CITIZEN NICHIA

STREET LIGHTING

INSPIRE



MODEL	POWER	LUMENS	DIMENSION
DZ-07-SL15SP**-60W	60W	8400LM	460x240x90mm
DZ-07-SL15SP**-90W	90W	12600LM	460x240x90mm
DZ-07-SL15SP**-120W	120W	16800LM	515x260x90mm
DZ-07-SL15SP**-150W	150W	21000LM	515x260x90mm
DZ-07-SL15SP**-180W	180W	25200LM	570x280x90mm

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza INSPIRE area light fixtures sleek, reliable design with precise ANSI optical distributions to make them the ideal upgrade for area/site, roadway, and security applications. INSPIRE is made with premium grade aluminium die cast housing with wide beam angle using high quality LED Chips.

LA DESCRIPTION

Les luminaires de zone **LeDenza INSPIRE** ont une conception élégante et fiable avec des distributions optiques ANSI précises pour en faire la mise à niveau idéale pour les applications de zone/site, de chaussée et de sécurité. INSPIRE est fabriqué avec un boîtier en aluminium moulé sous pression de qualité supérieure avec un angle de faisceau large utilisant des puces LED de haute qualité.

AREA OF APPLICATION

Street Lighting, Area Lighting, Sports Lighting

FEATURES

POWER FACTOR

INPUT

OPERATING TEMP.

LIFE SPAN

High Efficacy

Easy Installation

More Bright

Long Life

0.95


220-240V AC

-10°C to 40°C

50,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

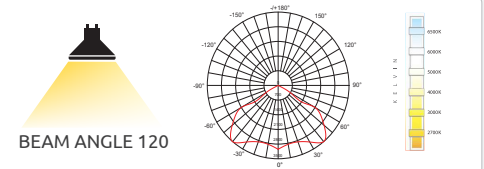

LED DRIVERS

OSRAM FULHAM PHILIPS

LED CHIPS

bridgelux. CREE CITIZEN NICHIA



STREET LIGHTING
DELTA



MODEL	POWER	LUMENS	DIMENSION
DZ-07-SL14DT**-22W	22W	2860LM	
DZ-07-SL14DT**-36W	36W	4680LM	
DZ-07-SL14DT**-50W	50W	6500LM	
DZ-07-SL14DT**-100W	100W	13000LM	
DZ-07-SL14DT**-150W	150W	19500LM	
DZ-07-SL14DT**-200W	200W	26000LM	

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza DELTA area light fixtures sleek, reliable design with precise ANSI optical distributions to make them the ideal upgrade for area/site, roadway, and security applications. DELTA is made with premium grade aluminium die cast housing with vandal resistant polycarbonate lens with high quality LED Chips.

LA DESCRIPTION

Luminaire de zone **LeDenza DELTA** design élégant et fiable avec des distributions optiques ANSI précises pour en faire la mise à niveau idéale pour les applications de zone/site, de chaussée et de sécurité. DELTA est fabriqué avec un boîtier en aluminium moulé sous pression de qualité supérieure avec une lentille en polycarbonate résistant au vandalisme avec des puces LED de haute qualité.


AREA OF APPLICATION

Street Lighting, Area Lighting, Highways

FEATURES	High Efficacy
	Easy Installation
	More Bright
	Long Life
POWER FACTOR	0.95
INPUT	220-240V AC
OPERATING TEMP.	-10°C to 40°C
LIFE SPAN	40,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

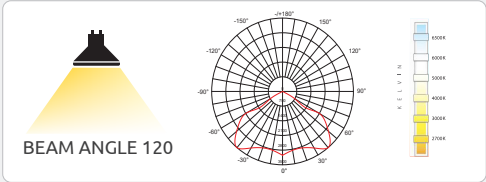

IP65

IK04

SMD

LED

ENERGY STAR

CRI > 80

LM-80

DALI (Optional)

1-10 DIMMING (Optional)

PHASE DIMMING (Optional)

LED DRIVERS

MW OSRAM FULHAM PHILIPS

LED CHIPS

bridgelux. CREE CITIZEN NICHIA