



FACADE
SERIES


LED 2 WAY WALL LIGHT

RAYZ



>>	MODEL	POWER	LUMENS	DIMENSION
WHITE BODY	DZ-11-WLHRYZ**-6W	6W	360LM	70x80x60MM
	DZ-11-WLFRYZ**-12W	12W	720LM	140x80x60MM
GRAY BODY	DZ-11-WLHRYZ**-6W	6W	360LM	70x80x60MM
	DZ-11-WLFRYZ**-12W	12W	720LM	140x80x60MM

**CW = 6500K; NW = 4000K; WW = 3000K

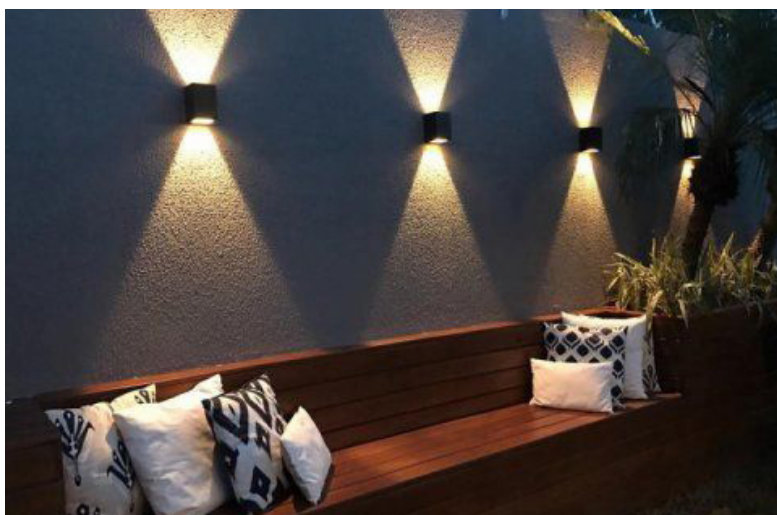

DESCRIPTION

LeDenza RAYZ are designed to provide aesthetically beautiful design on the exterior walls. The sturdy body in aluminium die cast gives all weather protection. Premium COB modules are the light source. The product is designed for long life, easy installation and low maintenance with seamless body.

LA DESCRIPTION

LeDenza RAYZ est conçu pour offrir un design esthétiquement beau sur les murs extérieurs. Le corps robuste en aluminium moulé sous pression offre une protection contre les intempéries. Les modules COB Premium sont la source de lumière. Le produit est conçu pour une longue durée de vie, une installation facile et un faible entretien avec un corps sans soudure.

AREA OF APPLICATION


Wall Mounted, Outdoor, Pillar Mounted.

FEATURES

FEATURES	High Efficacy
	Easy Installation
	More Bright
	Long Life
POWER FACTOR	0.95
INPUT	220-240V AC
OPERATING TEMP.	-10°C to 40°C
LIFE SPAN	25,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

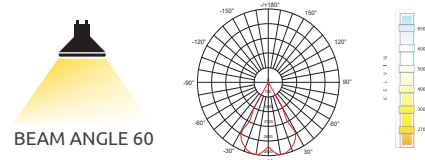

LED DRIVERS



LED CHIPS



LED 4 WAY / 2WAY WALL LIGHT GLISTER



	MODEL	POWER	LUMENS	DIMENSION
WHITE BODY	DZ-03-RSPZW8**-4W	4W	360LM	Ø 50x60MM
	DZ-03-RSPZW8**-8W	8W	720LM	Ø 65x60MM
	DZ-03-RSPZW8**-12W	12W	1080LM	Ø 75x60MM
BLACK BODY	DZ-03-RSPZB7**-4W	4W	360LM	Ø 50x60MM
	DZ-03-RSPZB7**-8W	8W	720LM	Ø 65x60MM
	DZ-03-RSPZB7**-12W	12W	1080LM	Ø 75x60MM

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza GLISTER is designed to provide aesthetically beautiful design on the exterior walls. The sturdy body in aluminium die cast gives all weather protection. Premium COB modules are the light source. The product is designed for long life, easy installation and low maintenance with seamless body.

LA DESCRIPTION

LeDenza GLISTER est conçu pour offrir un design esthétiquement beau sur les murs extérieurs. Le corps robuste en aluminium moulé sous pression offre une protection contre les intempéries. Les modules COB Premium sont la source de lumière. Le produit est conçu pour une longue durée de vie, une installation facile et un faible entretien avec un corps sans soudure.

AREA OF APPLICATION

Wall Mounted, Outdoor, Pillar Mounted.

FEATURES

POWER FACTOR

INPUT

OPERATING TEMP.

LIFE SPAN

High Efficacy

Easy Installation

More Bright

Long Life

0.95


220-240V AC

-10°C to 40°C

25,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

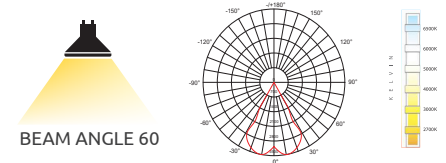

LED DRIVERS



LED CHIPS



LED 2 WAY WALL LIGHT

ZEETA



MODEL	POWER	LUMENS	DIMENSION
DZ-11-WLZTW8**-3W	3W	360LM	40x53x40MM
DZ-11-WLZTG9**-3W	3W	360LM	40x53x40MM

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza ZEETA are designed to provide aesthetically beautiful design on the exterior walls. The sturdy body in aluminium die cast gives all weather protection. Premium COB modules are the light source. The product is designed for long life, easy installation and low maintenance with seamless body.

LA DESCRIPTION

LeDenza ZEETA est conçu pour offrir un design esthétiquement beau sur les murs extérieurs. Le corps robuste en aluminium moulé sous pression offre une protection contre les intempéries. Les modules COB Premium sont la source de lumière. Le produit est conçu pour une longue durée de vie, une installation facile et un faible entretien avec un corps sans soudure.

AREA OF APPLICATION

Wall Mounted, Outdoor, Pillar Mounted.


FEATURES

POWER FACTOR	0.95
INPUT	220-240V AC
OPERATING TEMP.	-10°C to 40°C
LIFE SPAN	25,000 Hrs

High Efficacy
Easy Installation
More Bright
Long Life

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards



LED DRIVERS



LED CHIPS



LED 3 WAY WALL LIGHT

TRIPODZ



MODEL	POWER	LUMENS	DIMENSION
DZ-11-WLTDW8**-5W	5W	180LM	95MM
DZ-11-WLTDG9**-5W	5W	180LM	95MM

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza TRIPODZ are designed to provide aesthetically beautiful design on the exterior walls. The sturdy body in aluminium die cast gives all weather protection. Premium COB modules are the light source. The product is designed for long life, easy installation and low maintenance with seamless body.

LA DESCRIPTION

LeDenza TRIPOZ est conçu pour offrir un design esthétiquement beau sur les murs extérieurs. Le corps robuste en aluminium moulé sous pression offre une protection contre les intempéries. Les modules COB Premium sont la source de lumière. Le produit est conçu pour une longue durée de vie, une installation facile et un faible entretien avec un corps sans soudure.

AREA OF APPLICATION

Wall Mounted, Outdoor, Pillar Mounted.

FEATURES

POWER FACTOR

INPUT

OPERATING TEMP.

LIFE SPAN

High Efficacy

Easy Installation

More Bright

Long Life

0.95


220-240V AC

-10°C to 40°C

25,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

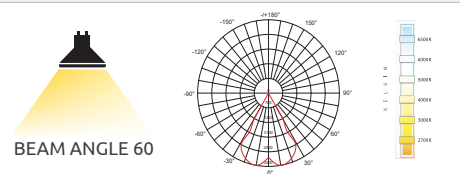

LED DRIVERS

OSRAM FULHAM PHILIPS

LED CHIPS

bridgelux. CREE CITIZEN NICHIA

LED 2 WAY WALL LIGHT

IRIS



MODEL	POWER	LUMENS	DIMENSION
DZ-11-WLIRW8**-12W	12W	120LM	52x82x60MM
DZ-11-WLIRG9**-12W	12W	120LM	52x82x60MM
DZ-11-WLIRB7**-12W	12W	120LM	52x82x60MM

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza IRIS are designed to provide aesthetically beautiful design on the exterior walls. The sturdy body in aluminium die cast gives all weather protection. Premium COB modules are the light source. The product is designed for long life, easy installation and low maintenance with seamless body.

LA DESCRIPTION

LeDenza IRIS est conçu pour offrir un design esthétiquement beau sur les murs extérieurs. Le corps robuste en aluminium moulé sous pression offre une protection contre les intempéries. Les modules COB Premium sont la source de lumière. Le produit est conçu pour une longue durée de vie, une installation facile et un faible entretien avec un corps sans soudure.

AREA OF APPLICATION


Wall Mounted, Outdoor, Pillar Mounted.

FEATURES

FEATURES	High Efficacy
	Easy Installation
	More Bright
	Long Life
POWER FACTOR	0.95
INPUT	220-240V AC
OPERATING TEMP.	-10°C to 40°C
LIFE SPAN	25,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

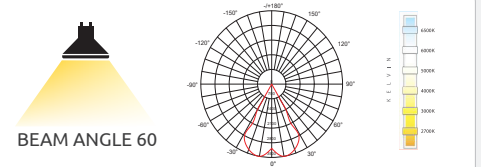

LED DRIVERS



LED CHIPS




LED 3 WAY WALL LIGHT

TOLEDO



MODEL	POWER	LUMENS	DIMENSION
DZ-11-WLTDW8**-4W	4W	180LM	150x40x75MM
DZ-11-WLTDG9**-4W	4W	180LM	150x40x75MM
DZ-11-WLTDB7**-4W	4W	180LM	150x40x75MM

**CW = 6500K; NW = 4000K; WW = 3000K

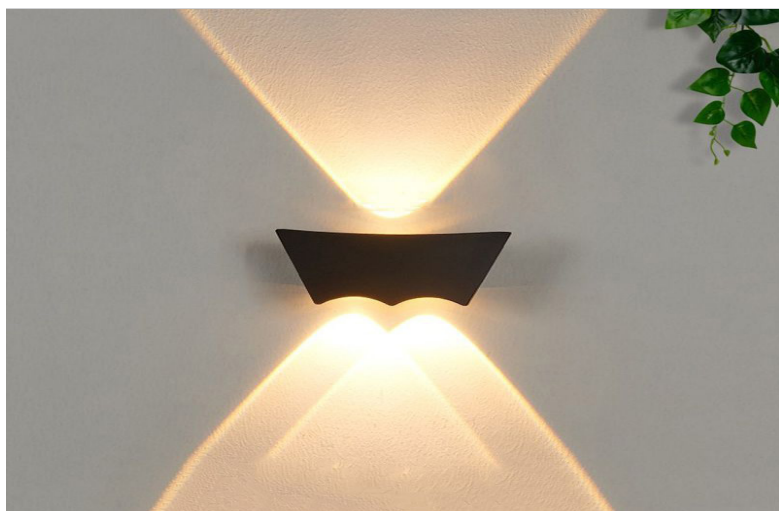

DESCRIPTION

LeDenza TOLEDO luminaire are designed to provide aesthetically beautiful design on the exterior walls. The sturdy body in aluminium die cast gives all weather protection. Premium COB modules are the light source. The product is designed for long life, easy installation and low maintenance with seamless body.

LA DESCRIPTION

Les luminaires **LeDenza** TOLEDO sont conçus pour offrir un design esthétiquement beau sur les murs extérieurs. Le corps robuste en aluminium moulé sous pression offre une protection contre les intempéries. Les modules COB Premium sont la source de lumière. Le produit est conçu pour une longue durée de vie, une installation facile et un faible entretien avec un corps sans soudure.

AREA OF APPLICATION

Wall Mounted, Outdoor, Pillar Mounted

FEATURES

POWER FACTOR

INPUT

OPERATING TEMP.

LIFE SPAN

High Efficacy

Easy Installation

More Bright

Long Life

0.95


220-240V AC

-10°C to 40°C

25,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

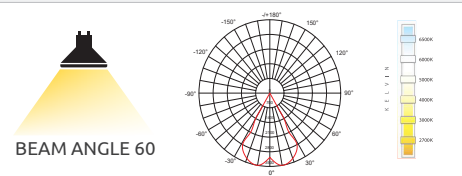

LED DRIVERS

OSRAM FULHAM PHILIPS

LED CHIPS

bridgelux. CREE CITIZEN NICHIA


LED 2X2 WAY WALL LIGHT

MAPLE



MODEL	POWER	LUMENS	DIMENSION
DZ-11-WLMPW8**-5W	5W	120LM	130x35x80MM
DZ-11-WLMPG9**-5W	5W	120LM	130x35x80MM
DZ-11-WLMPB7**-5W	5W	120LM	130x35x80MM

**CW = 6500K; NW = 4000K; WW = 3000K

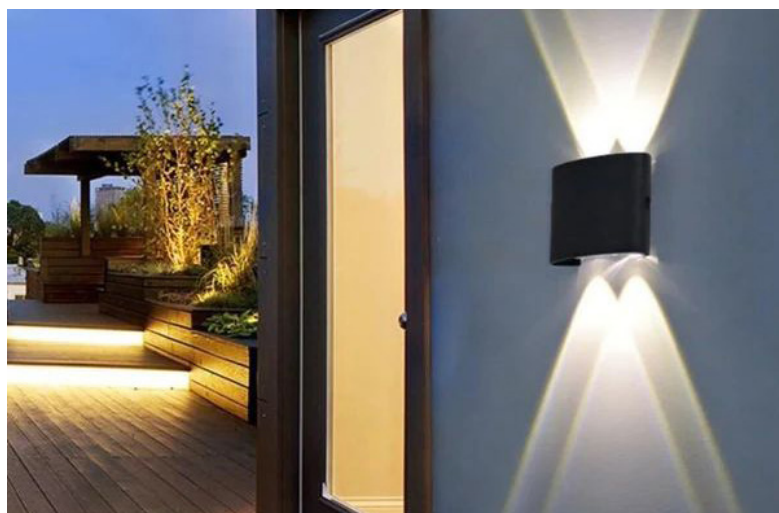

DESCRIPTION

LeDenza MAPLE luminaire are designed to provide aesthetically beautiful design on the exterior walls. The sturdy body in aluminium die cast gives all weather protection. Premium COB modules are the light source. The product is designed for long life, easy installation and low maintenance with seamless body.

LA DESCRIPTION

Les luminaires **LeDenza** MAPLE sont conçus pour offrir un design esthétiquement beau sur les murs extérieurs. Le corps robuste en aluminium moulé sous pression offre une protection contre les intempéries. Les modules COB Premium sont la source de lumière. Le produit est conçu pour une longue durée de vie, une installation facile et un faible entretien avec un corps sans soudure.

AREA OF APPLICATION


Wall Mounted, Outdoor, Pillar Mounted

FEATURES

FEATURES	High Efficacy
	Easy Installation
	More Bright
	Long Life
POWER FACTOR	0.95
INPUT	220-240V AC
OPERATING TEMP.	-10°C to 40°C
LIFE SPAN	25,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

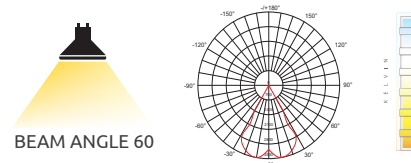

LED DRIVERS

MW OSRAM **FULHAM** PHILIPS

LED CHIPS

bridgelux. CREE CITIZEN NICHIA

LED RAMP LIGHT

FRITZ



MODEL	POWER	LUMENS	DIMENSION	CUTOUT
DZ-11-RLFZG9**-3W	3W	140LM	80x38x70MM	
DZ-11-RLFZB7**-3W	3W	140LM	80x38x70MM	

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza FRITZ luminaire are designed to provide aesthetically beautiful design on the exterior walls. The sturdy body in aluminium die cast gives all weather protection. Premium COB modules are the light source. The product is designed for long life, easy installation and low maintenance with seamless body.

LA DESCRIPTION

Les luminaires **LeDenza** FRITZ sont conçus pour offrir un design esthétiquement beau sur les murs extérieurs. Le corps robuste en aluminium moulé sous pression offre une protection contre les intempéries. Les modules COB Premium sont la source de lumière. Le produit est conçu pour une longue durée de vie, une installation facile et un faible entretien avec un corps sans soudure.

AREA OF APPLICATION

Wall Mounted, Outdoor, Pillar Mounted

FEATURES

POWER FACTOR

INPUT

OPERATING TEMP.

LIFE SPAN

High Efficacy

Easy Installation

More Bright

Long Life

0.95


220-240V AC

-10°C to 40°C

25,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

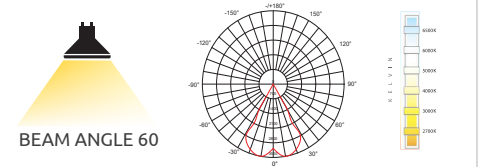

LED DRIVERS



LED CHIPS



LED RAMP LIGHT

GIMBAL



MODEL	POWER	LUMENS	DIMENSION
DZ-11-RLGBG9**-3W	3W	180LM	90x38x60MM
DZ-11-RLGBG9**-8W	8W	480LM	150x39x70MM
DZ-11-RLGBB7**-3W	3W	180LM	90x38x60MM
DZ-11-RLGBB7**-8W	8W	480LM	150x39x70MM

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza GIMBAL luminaire are designed to provide aesthetically beautiful design on the exterior walls. The sturdy body in aluminium die cast gives all weather protection. Premium COB modules are the light source. The product is designed for long life, easy installation and low maintenance with seamless body.

LA DESCRIPTION

Les luminaires **LeDenza** GIMBAL sont conçus pour offrir un design esthétiquement beau sur les murs extérieurs. Le corps robuste en aluminium moulé sous pression offre une protection contre les intempéries. Les modules COB Premium sont la source de lumière. Le produit est conçu pour une longue durée de vie, une installation facile et un faible entretien avec un corps sans soudure.

AREA OF APPLICATION

Wall Mounted, Outdoor, Pillar Mounted

FEATURES

POWER FACTOR

INPUT

OPERATING TEMP.

LIFE SPAN

High Efficacy

Easy Installation

More Bright

Long Life

0.95


220-240V AC

-10°C to 40°C

25,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

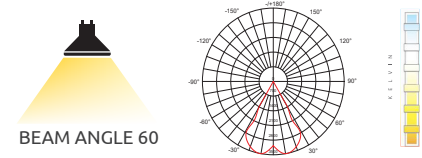

LED DRIVERS

 **OSRAM** **FULHAM** **PHILIPS**

LED CHIPS

 **CREE**  **NICHIA**


LED WALL WASH LIGHT

PHOENIX



MODEL	POWER	LUMENS	DIMENSION
DZ-11-WWPX01**-18W	18W	1800LM	500x48x66MM
DZ-11-WWPX02**-36W	36W	3600LM	1000x48x66MM
DZ-11-WWPX03**-24W	24W	2400LM	600x48x66MM
DZ-11-WWPX04**-48W	48W	4800LM	1200x48x66MM

**CW = 6500K; NW = 4000K; WW = 3000K

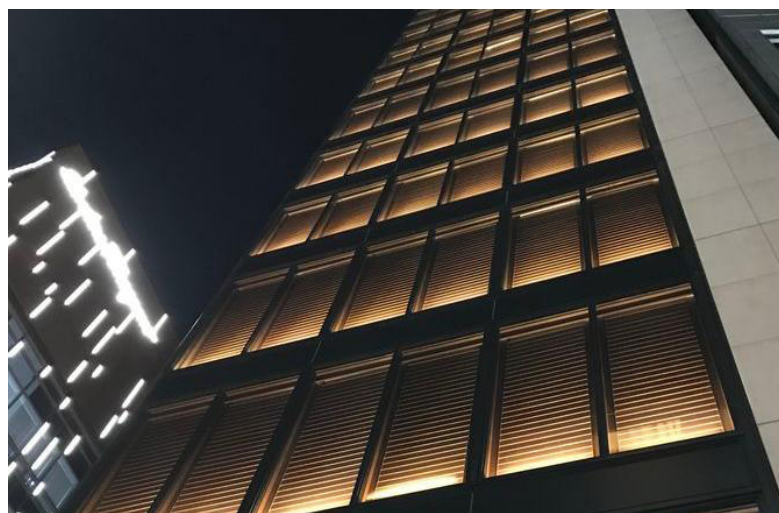

DESCRIPTION

LeDenza PHOENIX luminaire are designed to provide aesthetically beautiful design on the exterior walls. The sturdy body in aluminium die cast gives all weather protection. Premium COB modules are the light source. The product is designed for long life, easy installation and low maintenance with seamless body.

LA DESCRIPTION

Les luminaires **LeDenza** PHOENIX sont conçus pour offrir un design esthétiquement beau sur les murs extérieurs. Le corps robuste en aluminium moulé sous pression offre une protection contre les intempéries. Les modules COB Premium sont la source de lumière. Le produit est conçu pour une longue durée de vie, une installation facile et un faible entretien avec un corps sans soudure.

AREA OF APPLICATION

Facade, Garden, and WallWash

FEATURES

High Efficacy

Easy Installation

More Bright

Long Life

POWER FACTOR

0.95

INPUT

220-240V AC

OPERATING TEMP.


-10°C to 40°C

LIFE SPAN

30,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

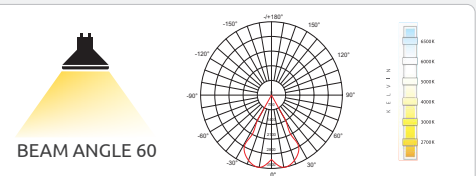

LED DRIVERS

OSRAM **FULHAM** **PHILIPS**

LED CHIPS

bridgelux **CREE** **CITIZEN** **NICHIA**

LED FACADE LIGHT

APPEX



MODEL	POWER	LUMENS	DIMENSION
DZ-11-FLAXG9**-10W	10W	1000LM	85x85x52MM
DZ-11-FLAXG9**-36W	36W	3600LM	172x172x69MM
DZ-11-FLAXG9**-45W	45W	4500LM	172x172x69MM
DZ-11-FLAXG9**-60W	60W	6000LM	172x172x69MM
DZ-11-FLAXG9**-100W	100W	10000LM	220x220x74MM

**CW = 6500K; NW = 4000K; WW = 3000K; RG = RGBW



DESCRIPTION

LeDenza APPEX luminaire are designed to provide aesthetically beautiful design on the exterior walls. The sturdy body in aluminium die cast gives all weather protection. Premium COB modules are the light source. The product is designed for long life, easy installation and low maintenance with seamless body.

LA DESCRIPTION

Les luminaires **LeDenza APPEX** sont conçus pour offrir un design esthétiquement beau sur les murs extérieurs. Le corps robuste en aluminium moulé sous pression offre une protection contre les intempéries. Les modules COB Premium sont la source de lumière. Le produit est conçu pour une longue durée de vie, une installation facile et un faible entretien avec un corps sans soudure.

AREA OF APPLICATION

Facade, Garden, and Focus Light

FEATURES

POWER FACTOR

INPUT

OPERATING TEMP.

LIFE SPAN

High Efficacy

Easy Installation

More Bright

Long Life

0.95


AC 220-240V / DC 48V

-20°C to 50°C

50,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

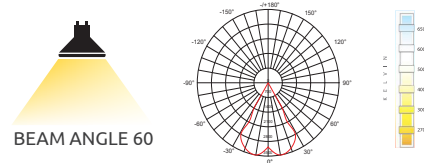

LED DRIVERS

MW OSRAM FULHAM PHILIPS

LED CHIPS

bridgelux. CREE CITIZEN NICHIA