



LANDSCAPE
SERIES

LED GATE TOP LIGHT PYRAMID



MODEL	POWER	LUMENS	CCT
DZ-10-GTLPYDCW-20W	20W	1980LM	6500K
DZ-10-GTLPYDNW-20W	20W	1980LM	4000K
DZ-10-GTLPYDWW-20W	20W	1980LM	3000K

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza PYRAMID Gate/Wall Top lights are style engineered with full on IP rated luminaires which are durable and aesthetically fabulous. The indirect downward throw of lighting glows the crystal PYRAMID which gives a glowing effect and good output. ABS body and diffuser provides a durable product.

LA DESCRIPTION

Les luminaires **LeDenza** PYRAMID Gate/Wall Top sont conçus avec des luminaires entièrement classés IP qui sont durables et esthétiquement fabuleux. La projection indirecte vers le bas de l'éclairage éclaire la PYRAMID en cristal, ce qui donne un effet lumineux et un bon rendement. Le corps et le diffuseur en ABS offrent un produit durable.

AREA OF APPLICATION


Gate, Wall Top, Garden.

FEATURES

POWER FACTOR	0.95
INPUT	220-240V AC
OPERATING TEMP.	-10°C to 40°C
LIFE SPAN	25,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

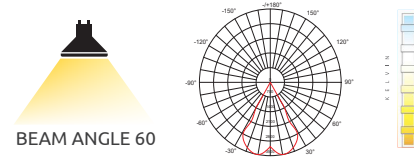

LED DRIVERS

MW OSRAM FULHAM PHILIPS

LED CHIPS

bridgelux. CREE CITIZEN NICHIA

LED WALL TOP LIGHT

NOBLE



MODEL	POWER	LUMENS	CCT
DZ-10-WTLNBLCW-12W	12W	960LM	6500K
DZ-10-WTLNBLNW-12W	12W	960LM	4000K
DZ-10-WTLNBLWW-12W	12W	960LM	3000K

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza NOBLE Wall Top lights are style engineered with full on IP rated luminaires which are durable and aesthetically fabulous. The diffused lighting glows gives an aesthetic effect in your backyard and good output in the area of lighting. NOBLE is made of high graded PC diffuser and premium LED chips.

LA DESCRIPTION

Les luminaires muraux **LeDenza** NOBLE sont conçus avec des luminaires entièrement classés IP qui sont durables et esthétiquement fabuleux. L'éclairage diffus donne un effet esthétique dans votre jardin et un bon rendement dans le domaine de l'éclairage. NOBLE est composé d'un diffuseur PC de haute qualité et de puces LED premium.

AREA OF APPLICATION

Gate, Wall Top, Garden.

FEATURES

POWER FACTOR

INPUT

OPERATING TEMP.

LIFE SPAN

High Efficacy

Easy Installation

More Bright

Long Life

0.95


220-240V AC

-10°C to 40°C

25,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

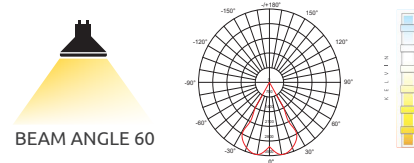

LED DRIVERS

OSRAM FULHAM PHILIPS

LED CHIPS

bridgelux. CREE CITIZEN NICHIA

LED BOLLARD LIGHT

ASTRIX



MODEL	POWER	LUMENS	DIMENSION
DZ-10-BLA1G9**-20W	20W	1500LM	50x80x1000MM
DZ-10-BLA2G9**-40W	40W	3000LM	50x80x1000MM
DZ-10-BLA1S6**-20W	20W	1500LM	50x80x1000MM
DZ-10-BLA2S6**-40W	40W	3000LM	50x80x1000MM

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza ASTRIX has the versatile shape design of a bollard light to satisfy the elegant landscaping requirements. The light source is an LED high efficiency system, which ensures high performances while saving energy. ASTRIX features like easy installation and very low maintenance.

LA DESCRIPTION

LeDenza ASTRIX a la conception de forme polyvalente d'une borne lumineuse pour répondre aux exigences élégantes de l'aménagement paysager. La source lumineuse est un système LED à haut rendement, qui assure des performances élevées tout en économisant de l'énergie. ASTRIX se caractérise par une installation facile et une maintenance très réduite.

AREA OF APPLICATION

Landscape, Pathway, Court yard

FEATURES

High Efficacy
Easy Installation
More Bright
Long Life

POWER FACTOR 0.95



INPUT 220-240V AC

OPERATING TEMP. -10°C to 40°C

LIFE SPAN 30,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

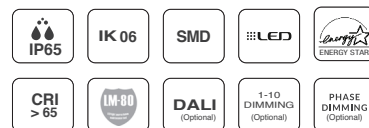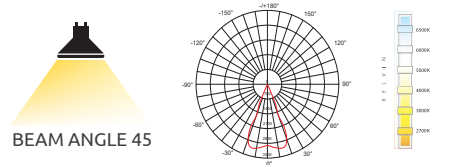

LED DRIVERS

MW OSRAM FULHAM PHILIPS

LED CHIPS

bridgelux. CREE CITIZEN NICHIA


LED BOLLARD LIGHT

LYTZON



MODEL	POWER	LUMENS	DIMENSION
DZ-10-BLYTG9**-20W	20W	1500LM	Ø100x1000MM
DZ-10-BLYTS6**-20W	20W	1500LM	Ø100x1000MM
DZ-10-BLYTB7**-20W	20W	1500LM	Ø100x1000MM

**CW = 6500K; NW = 4000K; WW = 3000K

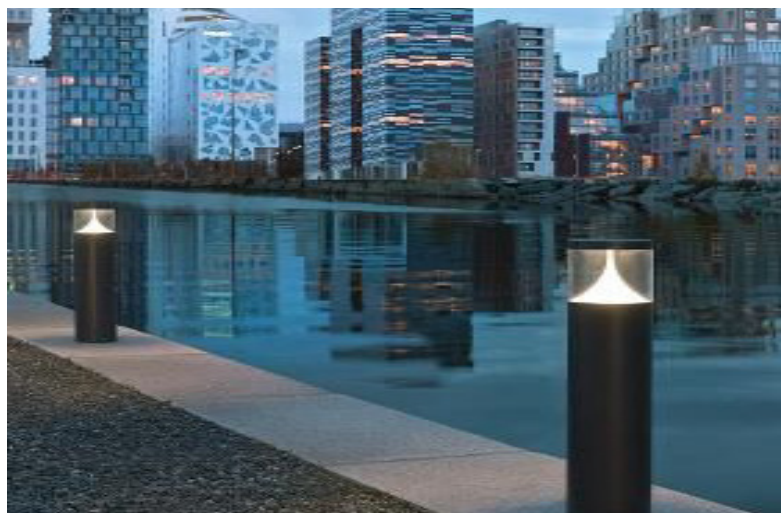

DESCRIPTION

LeDenza LYTZON has classic design of a bollard light, available with little differences in the top shape to satisfy the details lovers. The light source is an LED high efficiency system, which ensures high performances. LYTZON features like easy installation and very low maintenance.

LA DESCRIPTION

LeDenza LYTZON a le design classique d'une borne lumineuse, disponible avec de petites différences dans la forme supérieure pour satisfaire les amateurs de détails. La source lumineuse est un système LED à haut rendement, qui garantit des performances élevées. LYTZON se caractérise par une installation facile et une maintenance très réduite.

AREA OF APPLICATION

Landscape, Pathway, Court yard

FEATURES

POWER FACTOR

INPUT

OPERATING TEMP.

LIFE SPAN

High Efficacy

Easy Installation

More Bright

Long Life

0.95


220-240V AC

-10°C to 40°C

30,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

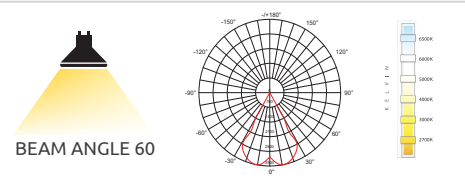

LED DRIVERS



OSRAM

FULHAM

PHILIPS

LED CHIPS



CREE



CITIZEN



NICHIA

LED BOLLARD LIGHT

ZAVIO



MODEL	POWER	LUMENS	DIMENSION
DZ-10-BLZ1G9**-20W	20W	3000LM	Ø100x300MM
DZ-10-BLZ2G9**-20W	20W	3000LM	Ø100x600MM
DZ-10-BLZ3G9**-20W	20W	3000LM	Ø100x900MM
DZ-10-BLZ1S6**-20W	20W	3000LM	Ø100x300MM
DZ-10-BLZ2S6**-20W	20W	3000LM	Ø100x600MM
DZ-10-BLZ3S6**-20W	20W	3000LM	Ø100x900MM

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza ZAVIO Bollard has a classic design of a bollard light, available with a curved top shape with glare reduction louvers to satisfy the details lovers. ZAVIO is equipped with high efficient light source and ensures easy installation and low maintenance

LA DESCRIPTION

LeDenza ZAVIO Bollard a un design classique de borne lumineuse, disponible avec une forme supérieure incurvée avec des persiennes anti-éblouissement pour satisfaire les amateurs de détails. ZAVIO est équipé d'une source lumineuse à haut rendement et assure une installation facile et une maintenance réduite

AREA OF APPLICATION

Landscape, Pathway, Court yard

FEATURES

High Efficacy

Easy Installation

More Bright

Long Life

POWER FACTOR

0.95

INPUT

220-240V AC

OPERATING TEMP.


-10°C to 40°C

LIFE SPAN

30,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

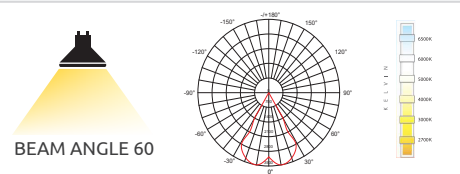

LED DRIVERS

MW OSRAM FULHAM PHILIPS

LED CHIPS

bridgelux. CREE CITIZEN NICHIA

LED BOLLARD LIGHT

CRETO



MODEL	POWER	LUMENS	DIMENSION
DZ-10-BLC1L4**-20W	10W	800LM	150x150x500MM
DZ-10-BLC2L3**-20W	10W	800LM	
DZ-10-BLC3L2**-20W	10W	800LM	

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza CRETO has the newest design of a bollard light with indirect lighting. The frame shaped louvers gives a homogenous product with good lighting effect in your courtyard. CRETO is equipped with high efficiency light source which ensures high performances while saving energy.

LA DESCRIPTION

LeDenza CRETO a la conception la plus récente d'une borne lumineuse à éclairage indirect. Les persiennes en forme de cadre donnent un produit homogène avec un bon effet d'éclairage dans votre cour. CRETO est équipé d'une source lumineuse à haut rendement qui assure des performances élevées tout en économisant de l'énergie.

AREA OF APPLICATION

Landscape, Pathway, Court yard

FEATURES

POWER FACTOR	0.95
INPUT	220-240V AC
OPERATING TEMP.	-10°C to 40°C
LIFE SPAN	30,000 Hrs

High Efficacy


Easy Installation

More Bright

Long Life

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

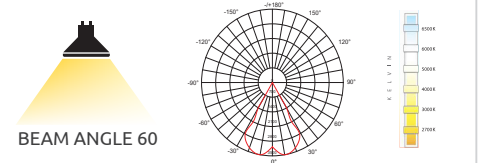

LED DRIVERS



LED CHIPS



LED BOLLARD LIGHT

RAPID



MODEL	POWER	LUMENS	DIMENSION
DZ-10-BLR2G9**-20W	20W	1600LM	Ø150x600MM
DZ-10-BLR3G9**-20W	20W	1600LM	Ø150x900MM
DZ-10-BLR4G9**-20W	20W	1600LM	Ø150x1200MM
DZ-10-BLR2S6**-20W	20W	1600LM	Ø150x600MM
DZ-10-BLR3S6**-20W	20W	1600LM	Ø150x900MM
DZ-10-BLR4S6**-20W	20W	1600LM	Ø150x1200MM

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza RAPID Wall bollard lights are style engineered which are durable and aesthetically fabulous. The indirect lighting gives an aesthetic effect in your backyard and good output in the area of lighting. RAPID is made of high graded extruded aluminium and premium LED chips.

LA DESCRIPTION

Les bornes lumineuses murales **LeDenza RAPID** sont conçues pour être durables et esthétiquement fabuleuses. L'éclairage indirect donne un effet esthétique dans votre jardin et un bon rendement dans le domaine de l'éclairage. RAPID est composé d'aluminium extrudé de haute qualité et de puces LED de qualité supérieure.

AREA OF APPLICATION


Offices, Villas, Apartments, Restaurants & Malls.

FEATURES

FEATURES	High Efficacy
	Easy Installation
	More Bright
	Long Life
POWER FACTOR	0.95
INPUT	220-240V AC
OPERATING TEMP.	-10°C to 40°C
LIFE SPAN	30,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

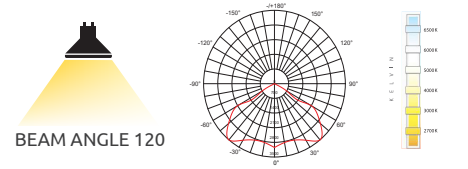

LED DRIVERS



LED CHIPS



LED SPIKE LIGHT CUE



MODEL	POWER	LUMENS	DIMENSION
DZ-10-SLCUG9**-3W	3W	270LM	63x76x280MM
DZ-10-SLCUG9**-5W	5W	450LM	63x76x280MM
DZ-10-SLCUG9**-9W	9W	810LM	80x140x350MM
DZ-10-SLCUG9**-12W	12W	1080LM	80x140x350MM
DZ-10-SLCUB7**-3W	3W	270LM	63x76x280MM
DZ-10-SLCUB7**-5W	5W	450LM	63x76x280MM
DZ-10-SLCUB7**-9W	9W	810LM	80x140x350MM
DZ-10-SLCUB7**-12W	12W	1080LM	80x140x350MM

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza CUE has promising LED source giving high performances while saving energy. This landscape light uniform and intense but comfortable, with low glare ratings. CUE can be used for outdoor use; and ensures excellent performances and energy saving at the same time.

LA DESCRIPTION

LeDenza CUE dispose d'une source LED prometteuse offrant des performances élevées tout en économisant de l'énergie. Ce paysage lumière uniforme et intense mais confortable, avec un faible indice d'éblouissement. CUE peut être utilisé pour une utilisation en extérieur ; et assure d'excellentes performances et des économies d'énergie en même temps.

AREA OF APPLICATION

Landscape, Tree Spike, Court yard

FEATURES

POWER FACTOR

INPUT

OPERATING TEMP.

LIFE SPAN

High Efficacy

Easy Installation

More Bright

Long Life

0.95


220-240V AC

-10°C to 40°C

30,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

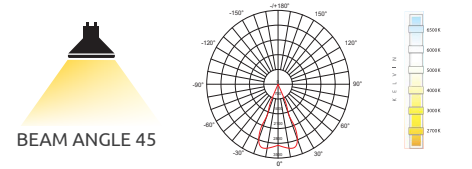

LED DRIVERS

OSRAM FULHAM PHILIPS

LED CHIPS

bridgelux. CREE CITIZEN NICHIA

LED FOCUS LIGHT

IGNOX



MODEL	POWER	LUMENS	DIMENSION
DZ-10-FLIXG9**-5W	5W	500LM	80x140MM
DZ-10-FLIXG9**-9W	9W	900LM	80x140MM
DZ-10-FLIXG9**-15W	15W	1500LM	80x140MM
DZ-10-FLIXG9**-20W	20W	2000LM	80x140MM

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza IGNOX is an LED landscape elevation projector light with energy-efficient solution for architectural lighting, garden lighting, outdoor accent lighting, tree up-lighting, and sign lighting. The light source of IGNOX is high efficiency; advanced technology with extruded aluminium body and weatherproof features.

LA DESCRIPTION

LeDenza IGNOX est un projecteur d'élévation de paysage à LED avec une solution écoénergétique pour l'éclairage architectural, l'éclairage de jardin, l'éclairage d'accentuation extérieur, l'éclairage des arbres et l'éclairage des enseignes. La source lumineuse d'IGNOX est à haut rendement ; technologie de pointe avec corps en aluminium extrudé et caractéristiques de résistance aux intempéries.

AREA OF APPLICATION

Offices, Villas, Apartments, Restaurants & Malls.

FEATURES

POWER FACTOR

INPUT

OPERATING TEMP.

LIFE SPAN

High Efficacy

Easy Installation

More Bright

Long Life

0.95


220-240V AC

-10°C to 40°C

25,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

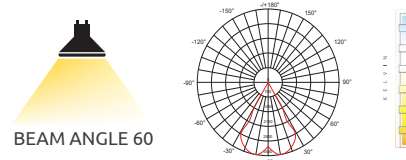

LED DRIVERS



LED CHIPS




INGROUND LIGHT

HUGO



MODEL	POWER	LUMENS	DIMENSION	CUTOUT
DZ-10-IGHTS5**-3W	3W	180LM	Ø 65x75MM	Ø 60MM
DZ-10-IGHTS5**-9W	9W	540LM	Ø 150x90MM	Ø 145MM
DZ-10-IGHTS5**-12W	12W	720LM	Ø 160x90MM	Ø 155MM
DZ-10-IGHTS5**-18W	18W	1080LM	Ø 180x90MM	Ø 175MM

**CW = 6500K; NW = 4000K; WW = 3000K

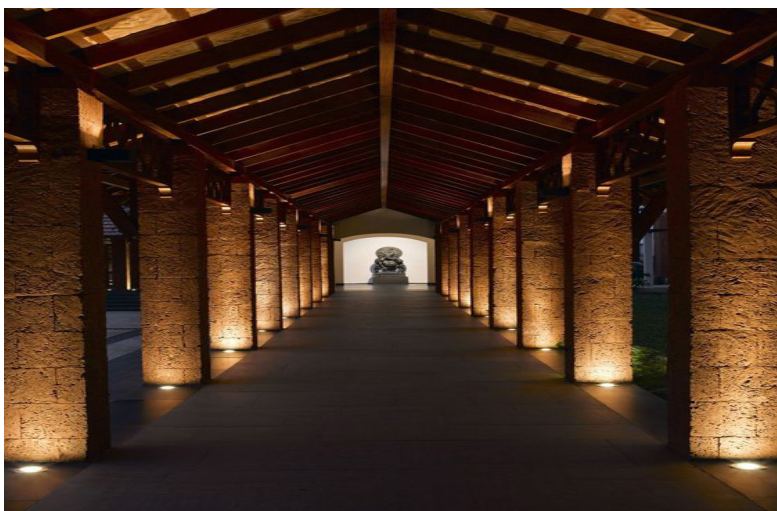

DESCRIPTION

LeDenza HUGO in-ground uplight creates a very positive effect as it is used for flood facades strikingly with light. HUGO uplight is buried flush with the ground thus it can be visible like an elegant object. Glare-free illumination for residential buildings, villas, gardens and other iconic structures. Construction is Die cast aluminum, SS Trim and Toughened glass.

LA DESCRIPTION

L'éclairage encastré au sol LeDenza HUGO crée un effet très positif car il est utilisé pour les façades inondées de façon saisissante avec la lumière. Le uplight HUGO est enterré au ras du sol et peut donc être visible comme un objet élégant. Éclairage sans éblouissement pour les bâtiments résidentiels, villas, jardins et autres structures emblématiques. La construction est en aluminium moulé sous pression, en acier inoxydable et en verre trempé.

AREA OF APPLICATION

Facade, Ramp Light, Walkway.

FEATURES

High Efficacy

Easy Installation

More Bright

Long Life

POWER FACTOR

0.95

INPUT

220-240V AC

OPERATING TEMP.


-10°C to 40°C

LIFE SPAN

30,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

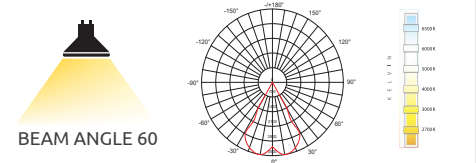

LED DRIVERS



OSRAM

FULHAM

PHILIPS

LED CHIPS



CREE



NICHIA

INGROUND LIGHT

ELVIZ



MODEL	POWER	LUMENS	DIMENSION	CUTOUT
DZ-10-IGELS5**-7W	7W	420LM	300x80x100MM	392x70MM
DZ-10-IGELS5**-12W	12W	720LM	500x80x100MM	492x70MM
DZ-10-IGELS5**-20W	20W	1200LM	1000x80x100MM	992x70MM

**CW = 6500K; NW = 4000K; WW = 3000K



DESCRIPTION

LeDenza ELVIZ in-ground linear light generates a luminous effect in façades. The LED luminaire ELVIZ is well-designed, apparent like an object and achieves a maximum effect as a wall-washer for façades in buildings and heritage important areas. Construction is Die cast aluminum, SS Trim and Toughened glass.

LA DESCRIPTION

Le luminaire linéaire encastré au sol **LeDenza ELVIZ** génère un effet lumineux sur les façades. Le luminaire à LED ELVIZ est bien conçu, apparent comme un objet et atteint un effet maximal en tant que lèche-mur pour les façades des bâtiments et des zones patrimoniales importantes. La construction est en aluminium moulé sous pression, en acier inoxydable et en verre trempé.

AREA OF APPLICATION


Facade, Wall Wash, Ramp.

FEATURES

POWER FACTOR	0.95
INPUT	220-240V AC
OPERATING TEMP.	-10°C to 40°C
LIFE SPAN	30,000 Hrs

Efficacy Rating ★★★★★

Manufactured in accordance with all International Standards

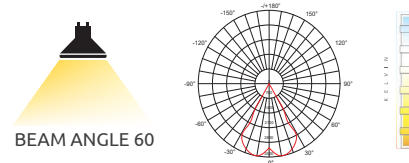

LED DRIVERS

MW OSRAM FULHAM PHILIPS

LED CHIPS

bridgelux. CREE CITIZEN NICHIA